


SPECIFICATION DATA
MOYNO® 500 PUMPS
200 SERIES
203, 204, 205, 220, AND 232 MODELS

DIMENSIONS

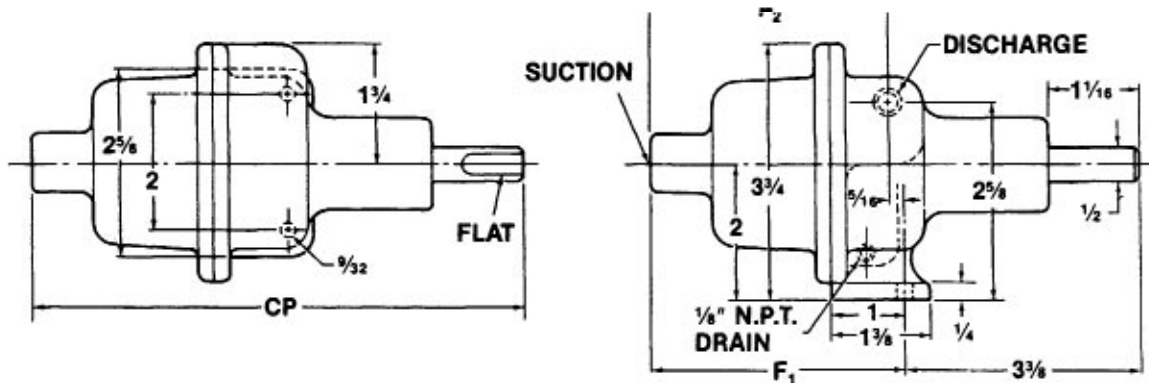

PORT SIZES

MODELS	CP	F ₁	F ₂	SUCTION	DISCHARGE
20501, 22001	6 ^{11/16}	3 ^{5/16}	3 ^{3/8}	3/8 NPT	3/8 NPT
20302, 20402, 20502, 22002	7 ^{1/16}	3 ^{11/16}	3 ^{3/8}	3/8 NPT	3/8 NPT
23201, 23203	8 ^{3/16}	4 ^{13/16}	4 ^{1/2}	1/2 NPT	1/2 NPT






All dimensions are in inches.
Specifications subject to change without notice.

MATERIALS OF CONSTRUCTION

COMPONENT	MODELS			
	20501, 22001	20302, 20402, 20502, 22002	23201	23203
Housing	Aluminum	316 SS	Aluminum	316 SS
Rotor	Phenolic	316 SS	416 SS/CP*	316 SS/CP*
Stator	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)
Weight (lbs)	3	5	3	6

*CP =Chrome plated

PERFORMANCE (Water at 70°F)

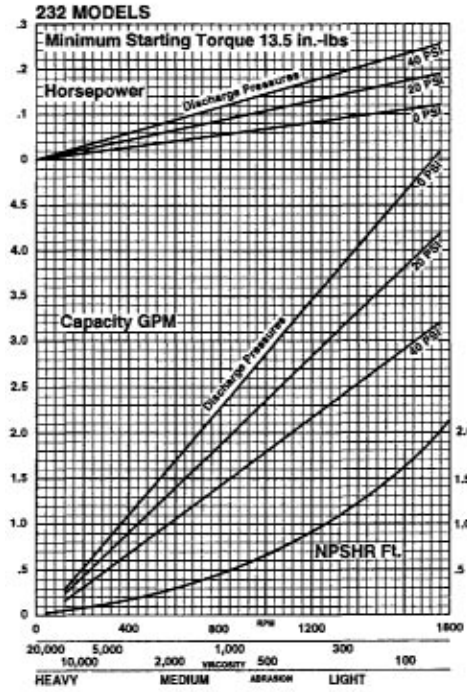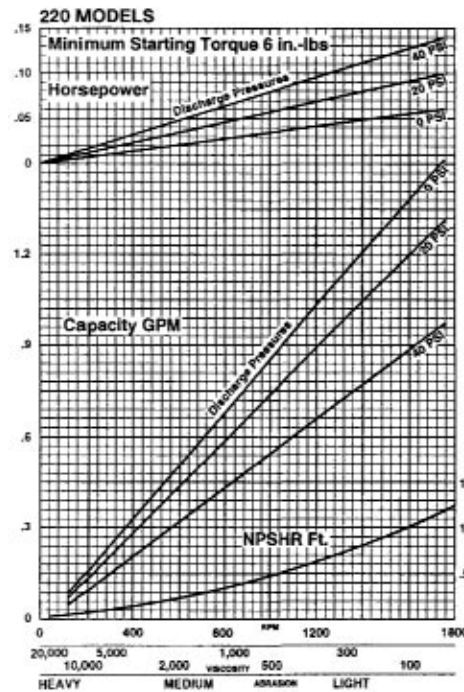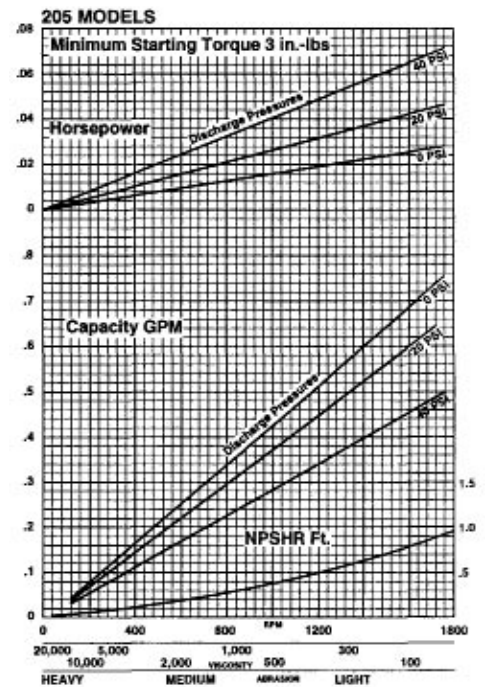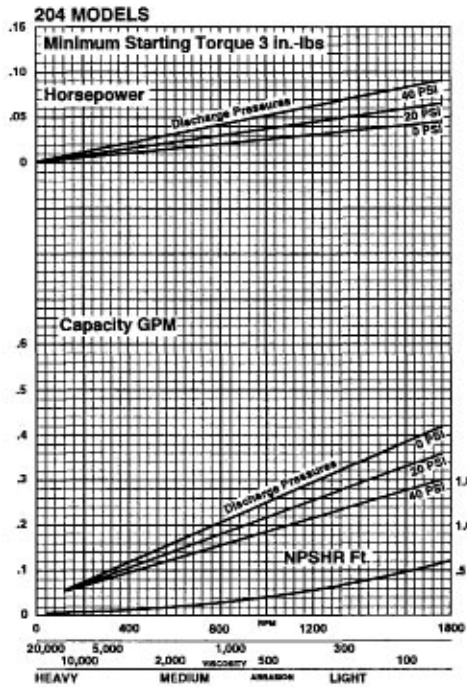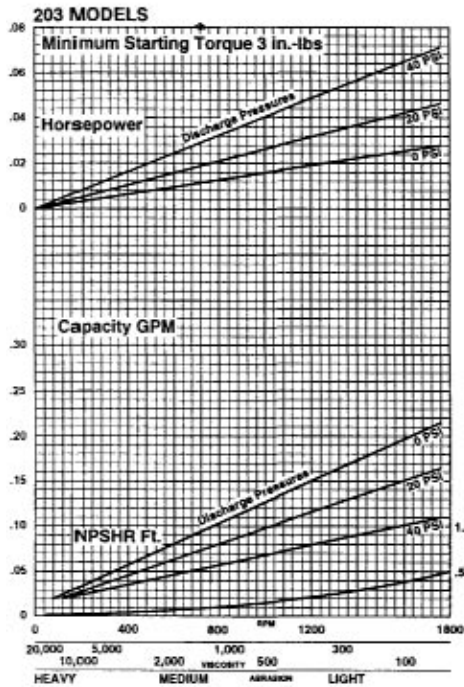

NOTE: For fluids with viscosity over 200 CP (1000 SSU), pump capacity is reduced by 20%.